


# MOSO® Bamboo X-treme® Outdoor Cladding


## Rebated & Trapezium profile

MOSO® Bamboo X-treme® Outdoor Cladding are solid boards in various widths for exterior applications. The boards are made from bamboo strips that have been compressed and thermally modified at 200°C. This unique Thermo-Density® process provides MOSO® Bamboo X-treme® with the highest durability class possible in the appropriate EU norms, increases the stability and density, and consequently the hardness. Furthermore, contrary to other wood products, this material can achieve fire resistance Class B-s1-d0<sup>1)</sup> (EN 13501-1) without impregnation with expensive and eco-damaging fire retardants. Bamboo X-treme® Cladding with the Rebated profile is made for installation with MOSO® Fasteners (18 mm) and screws and the Trapezium profile is made for installation with screws. Like any tropical hardwood species, when exposed to outdoor conditions, MOSO® Bamboo X-treme® will turn grey over time creating a natural look.


Rebated profile

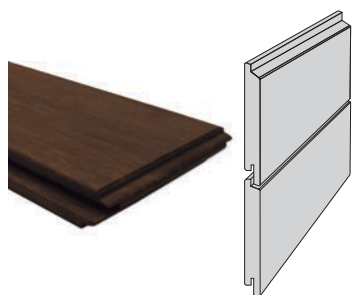

Trapezium profile



End-matched



Product Code	Shape	Finish	Surface	End-matched	Length edges	End edges	Effective width (mm)*	Dimensions (mm)
BO-DTHT500G	Rebated profile	Unfinished	Flat	Yes	R3	2 mm x 45°	125	1850x137x18
BO-DTHT505G	Rebated profile	Unfinished	Flat	Yes	R3	2 mm x 45°	63	1850x75x18
BO-DTHT510	Trapezium profile	Unfinished	Flat	Yes	R3	2 mm x 45°	132	1850x137x18
BO-DTHT515	Trapezium profile	Unfinished	Flat	Yes	R3	2 mm x 45°	70	1850x75x18
BO-DTHT525	Trapezium profile	Unfinished	Flat	No	R1	1.5 mm x 45°	70	1850x75x12

\* Effective width without gap between the boards, recommended gap 6 mm.

### installation

- MOSO® guarantees the bamboo material and the mounting materials (fastener/screw) it supplies but does not guarantee the connection with other materials (such as sub frame joist/battens). It is the responsibility of the installer to make sure the used screw matches such materials during the full lifetime of the product.
- For installation with fasteners, the MOSO® Fasteners CLIP-SCREW-BX09 with screws and MOSO® Fasteners CLIP-BX09 without screws are available. More information about the MOSO® Fasteners can be found: ▶ [www.moso-bamboo.com/x-treme/accessories](http://www.moso-bamboo.com/x-treme/accessories)
- Store in a cool and dry place away from direct sunlight, and protected from weather influences, dirt and dust.
- Full version available at: ▶ [www.moso-bamboo.com/x-treme/cladding](http://www.moso-bamboo.com/x-treme/cladding)

### technical characteristics and certifications

- Density: ± 1150 kg/m<sup>3</sup>
- Dimensional stability: length: + 0.1%; width: + 0.9% (24 hours in water 20°C)
- Resistance to Indentation - Brinell Hardness: ± 9.5 kg/mm<sup>2</sup> (average value - EN 1534)
- Reaction to fire: Class B-s1-d0 (EN 13501-1)<sup>1)</sup>
- Flame spread index: Class A (ASTM E84)
- Thermal emittance: 0.81 (ASTM C1371)<sup>2)</sup>
- Solar Reflectance (SR): 0.32 (ASTM C1549)<sup>2)</sup>
- Solar Reflectance Index (SRI): Low 27, Medium 30, High 33 (ASTM E1980)<sup>2)</sup>
- Modulus of Elasticity: 13565 N/mm<sup>2</sup> (mean value - EN 408)
- Bending strength: 54.4 N/mm<sup>2</sup> (characteristic value - EN 408)
- Biological durability: Class 1 (EN 350 / CEN/TS 15083-2), simulated graveyard test / Class 1 (EN 350 / CEN/TS 15083-1)
- Effectiveness against Blue Stain: Class 0 (EN 152)
- Effectiveness against European Termites: Class M (EN 350 / EN 117 - Coptotermes gestroi)
- Use Class: Class 4 (EN 335)
- CO<sub>2</sub> neutral: LCA report TU Delft (ISO 14040/44) ([www.moso-bamboo.com/lca](http://www.moso-bamboo.com/lca))
- Environmental Product Declaration - EPD (EN 15804) ([www.moso-bamboo.com/epd](http://www.moso-bamboo.com/epd))
- FSC®: Products available with FSC® certification on request.
- Contribution LEED BD+C - v4: MR 1, MR 2, MR 3 (FSC®), SS 7 v2009: MR 6, MR 7 (FSC®)
- Contribution BREEAM: MAT 1, MAT 3 (FSC®), MAT 5 (HD)
- Guarantee: 25 years

<sup>1)</sup> Tested on 18 mm thickness, without gaps between boards, with ventilation space behind boards.

<sup>2)</sup> Tested on 3 years weathered MOSO® Bamboo X-treme®.



Also available with FSC® certification.



The mark of responsible forestry  
FSC® C002063



breeam